



WEVER & DUCRÉ  
LIGHTING

# HEXO WALL mini 1.0

300420Q0

Project
Type
Notes
Quantity
Date

## GENERAL

Wall  
 Surface  
 Bronze  
 IP20  
 Interior  
 445<sup>a</sup> to 450<sup>b</sup> lm

## LED

Lamp PAR16  
 PAR16  
 Socket GU10  
 max. 12 W  
 CRI 80  
 L70 / 50000 h

## OPTICAL

Beam angle 48°

## PHYSICAL




Diameter 77 mm  
 Height 115 mm  
 0.23 kg

## ELECTRICAL


100 - 240 V  
 Total connected power 6.6<sup>b</sup> to 6.7<sup>a</sup> W  
 PC1  
 Safety distance 0.3 m

<sup>a</sup> LED 3000K CRI 80 white

<sup>b</sup> LED 2700K CRI 80 white

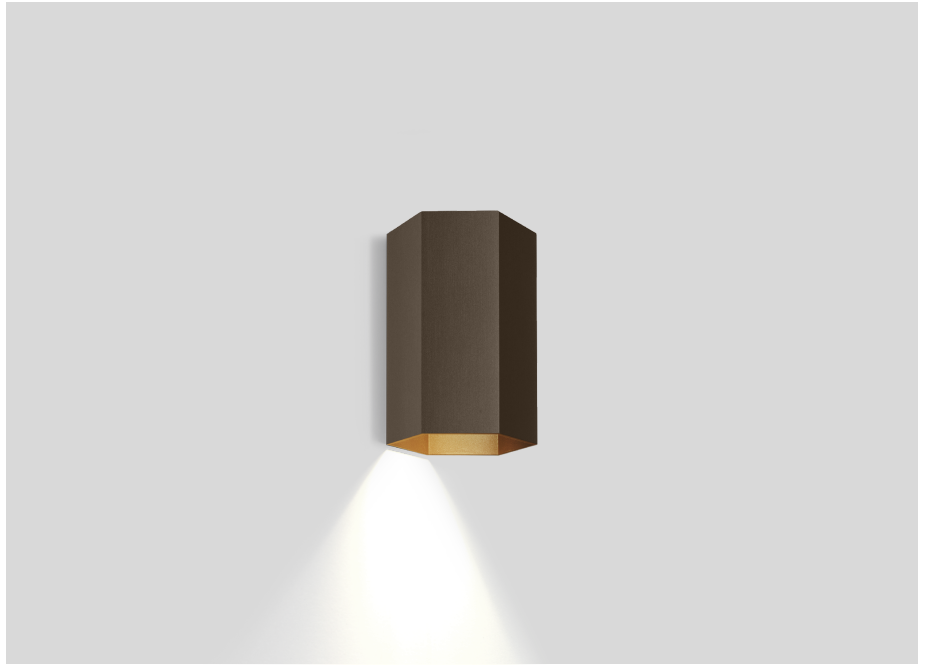

## LIGHT DISTRIBUTION





**WEVER & DUCRÉ**  
LIGHTING

# HEXO

## WALL mini 1.0

300420Q0

### CONE DIAGRAM

LED 3000K CRI ≥ 80°white

h (m)	EO° (lx)	ø (m)
1	657	0.89
2	164	1.78
3	73	2.66
4	41	3.55
5	26	4.44

### LED LAMPS

#### PAR16 LED Lamp

TYPE	COLOUR	Ø·H (MM)	ORDERCODE
2700K   >90 CRI   GU10	Jet Black	ø50·58	9 0 1 2 2 8 B 3
3000K   >90 CRI   GU10	Jet Black	ø50·58	9 0 1 2 2 8 B 5
2700K   >80 CRI   GU10	Signal White	ø50·58	9 0 1 2 2 8 W 2
2700K   >90 CRI   GU10	Signal White	ø50·58	9 0 1 2 2 8 W 3
3000K   >80 CRI   GU10	Signal White	ø50·58	9 0 1 2 2 8 W 4