



WEVER & DUCRÉ  
LIGHTING

# PALOS WALL 1.0

416174A4

Project \_\_\_\_\_

Type \_\_\_\_\_

Notes \_\_\_\_\_

Quantity \_\_\_\_\_

Date \_\_\_\_\_

## GENERAL

Wall \_\_\_\_\_

Surface \_\_\_\_\_

Anthracite Grey \_\_\_\_\_

IP65 \_\_\_\_\_

Exterior \_\_\_\_\_

520 lm \_\_\_\_\_

RAL 7016 <sup>a</sup> \_\_\_\_\_

## LED

3000 K \_\_\_\_\_

## OPTICAL

Wide Flood \_\_\_\_\_

## PHYSICAL

Length 130 mm \_\_\_\_\_

Width 100 mm \_\_\_\_\_

Height 60 mm \_\_\_\_\_

0.86 kg \_\_\_\_\_

## ELECTRICAL

phase-cut dim \_\_\_\_\_



220 - 240 V \_\_\_\_\_

Total connected power 9.5 W \_\_\_\_\_

PC1 \_\_\_\_\_

Safety distance 0.3 m \_\_\_\_\_

<sup>a</sup> RAL Palette colors may deviate slightly due to production conditions.

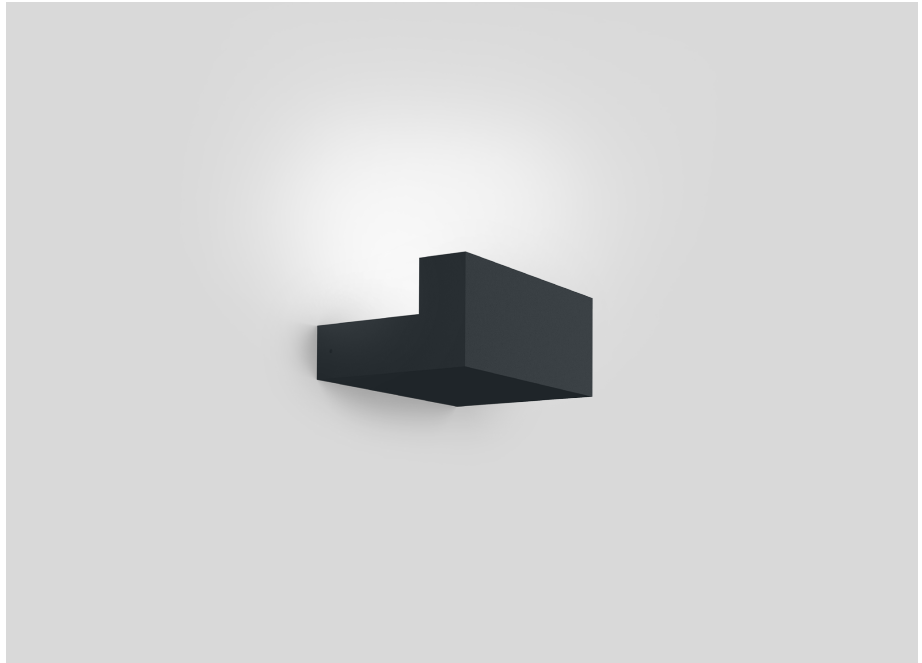

[416174A4] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for September 23, 2021 the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BVBA apply.