



WEVER & DUCRÉ
LIGHTING

SMILE IN 2.0

703151L4

Project

Type

Notes

Quantity

Date

GENERAL

Wall
Recessed
Aluminium Brushed
IP20
Interior
235^a to 315^b lm

LED

3000 K
CRI 80
L95 / 50000 h
3-step binning
MR 0.56
MDER 0.51

PHYSICAL

Length 100 mm
Width 37 mm
Height 100 mm
0.42 kg

ELECTRICAL


excl. power supply
9 V
Total connected power 4.1^a to 6^b W
350^a to 500^b mA
PC3
Safety distance 0.3 m

CUTOUT


Diameter 86-88 mm
Min. ceiling thickness 13 mm
Recessed depth 40 mm

^a 350mA

^b 500mA



LIGHT DISTRIBUTION

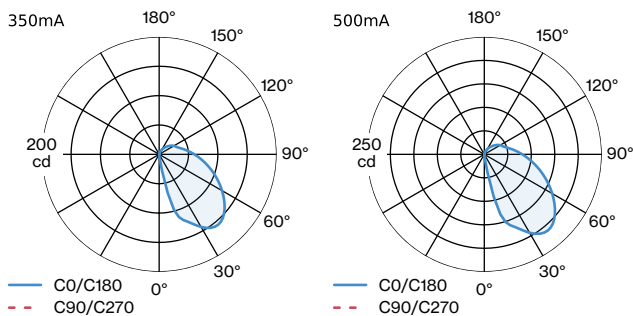

[703151L4] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for September 23, 2021 the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BVBA apply.
© Wever & Ducré BVBA · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ
LIGHTING

SMILE IN 2.0

703151L4

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.98	0.98	0.98	0.97
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

MOUNTING

Recessed Housing

TYPE	Ø · H (MM)	ORDERCODE
SMILE IN	∅90 · 50	9 0 0 1 2 0 3 0

POWER SUPPLIES

Power Supply

TYPE	L · W · H (MM)	ORDERCODE
Driver 6W 350mA 3-22V	64 · 35 · 21	9 0 2 1 3 2 0 2
Driver 6W 500mA 3-12V	64 · 35 · 21	9 0 2 1 4 2 0 1