



WEVER & DUCRÉ
LIGHTING

STRANGE 1.7

320271S4

Project

Type

Notes

Quantity

Date

GENERAL

Wall
Recessed
White Aluminium
IP20
Interior
165^a to 210^b lm
RAL 9006 ^c

LED

3000 K
CRI 80
L90 / 50000 h
3-step binning

PHYSICAL

Length 76 mm
Width 50 mm
Height 168 mm
0.24 kg

ELECTRICAL

excl. power supply
6 V
Total connected power 3.9^a to 5.6^b W
500^a to 700^b mA
PC3
Safety distance 0.3 m



CUTOUT

Length 86 mm
Width 170 mm
Min. ceiling thickness 2 mm
Max. ceiling thickness 25 mm
Recessed depth 55 mm


^a 500mA

^b 700mA

^c RAL Palette colors may deviate slightly due to production conditions.



LIGHT DISTRIBUTION

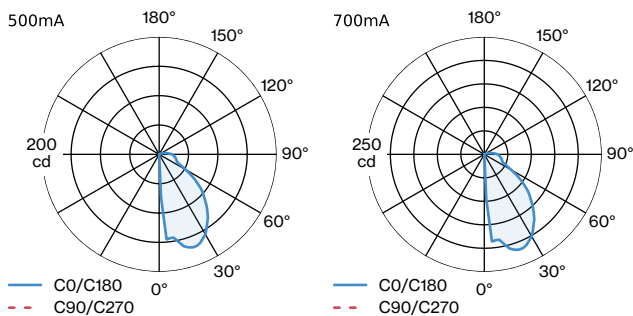

[320271S4] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BVBA apply.
© Wever & Ducré BVBA · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ
LIGHTING

STRANGE 1.7

320271S4

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.99	0.97	0.95	0.94	0.92
LSF	1	1	1	1	1

MF LMF × RSMF × LLMF × LSF RSMF^a Room Surface Maintenance Factor
 MF Maintenance Factor LLMF Lamp Lumens Maintenance Factor
 LMF^a Luminaire Maintenance Factor LSF Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

POWER SUPPLIES

Power Supply

TYPE	L · W · H (MM)	ORDERCODE
Driver 6W 500mA 3-12V	64-35-21	9 0 2 1 4 2 0 1
Driver 6W 700mA 3-8.4V	64-35-21	9 0 2 1 5 2 0 3