



WEVER & DUCRÉ  
LIGHTING

# STRANGE 2.7

320371S4

Project
Type
Notes
Quantity
Date

### GENERAL

Wall  
 Recessed  
 White Aluminium  
 IP20  
 Interior  
 165<sup>a</sup> to 210<sup>b</sup> lm  
 RAL 9006 <sup>c</sup>

### LED

3000 K  
 CRI 80  
 L90 / 50000 h  
 3-step binning

### PHYSICAL

Length 76 mm  
 Width 50 mm  
 Height 268 mm  
 0.31 kg

### ELECTRICAL

excl. power supply  
 6 V  
 Total connected power 3.9<sup>a</sup> to 5.6<sup>b</sup> W  
 500<sup>a</sup> to 700<sup>b</sup> mA  
 PC3  
 Safety distance 0.3 m



### CUTOUT

Length 86 mm  
 Width 270 mm  
 Min. ceiling thickness 2 mm  
 Max. ceiling thickness 25 mm  
 Recessed depth 55 mm


<sup>a</sup> 500mA

<sup>b</sup> 700mA

<sup>c</sup> RAL Palette colors may deviate slightly due to production conditions.



### LIGHT DISTRIBUTION

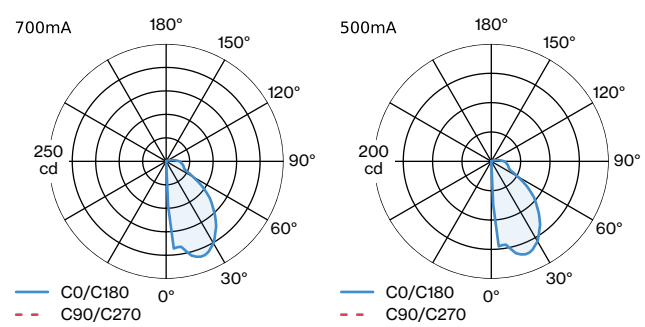

[320371S4] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BVBA apply.  
 © Wever & Ducré BVBA · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



**WEVER & DUCRÉ**  
LIGHTING

# STRANGE 2.7

320371S4

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.99	0.97	0.95	0.94	0.92
LSF	1	1	1	1	1

MF LMF × RSMF × LLMF × LSF RSMF<sup>a</sup> Room Surface Maintenance Factor  
 MF Maintenance Factor LLMF Lamp Lumens Maintenance Factor  
 LMF<sup>a</sup> Luminaire Maintenance Factor LSF Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## POWER SUPPLIES

### Power Supply

TYPE	L · W · H (MM)	ORDERCODE
Driver 6W   500mA   3-12V	64-35-21	9 0 2 1 4 2 0 1
Driver 6W   700mA   3-8.4V	64-35-21	9 0 2 1 5 2 0 3