



WEVER & DUCRÉ
LIGHTING

STRIPE 0.7

305251W4

Project _____

Type _____

Notes _____

Quantity _____

Date _____

GENERAL

Wall _____

Recessed _____

Signal White _____

IP20 _____

Interior _____

11^a to 19^b lm _____

RAL 9003^c _____

LED

3000 K _____

CRI 80 _____

L90 / 50000 h _____

3-step binning _____

PHYSICAL

Length 70 mm _____

Width 37 mm _____

Height 70 mm _____

0.1 kg _____

ELECTRICAL

excl. power supply _____

3 V _____

Total connected power 1.4^a to 2.8^b W
350^a to 700^b mA _____

PC3 _____

Safety distance 0.3 m _____

CUTOUT

Length 25 mm _____

Width 56 mm _____

Min. ceiling thickness 8 mm _____




Max. ceiling thickness 18 mm _____

Recessed depth 40 mm _____


^a 350mA

^b 700mA

^c RAL Palette colors may deviate slightly due to production conditions.

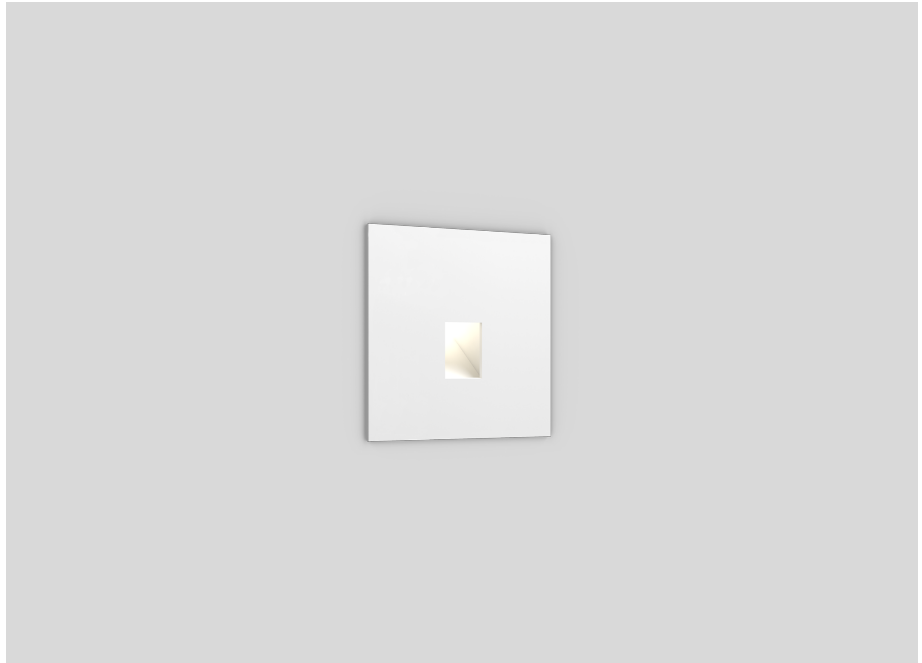

LIGHT DISTRIBUTION

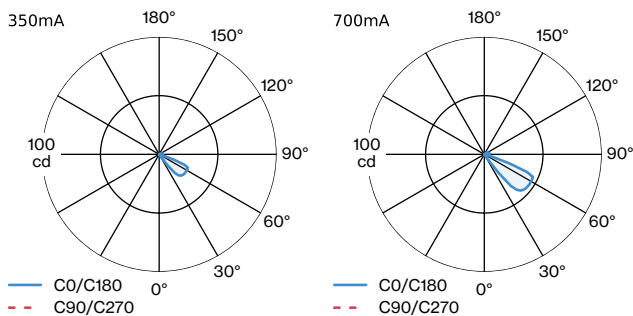



WEVER & DUCRÉ
LIGHTING

STRIPE 0.7

305251W4

MOUNTING

Plasterkit + Recessed Housing

TYPE	L · W · H (MM)	ORDERCODE
STRIPE 0.4 0.7	100 · 61 · 100	9 0 0 1 2 0 3 7

POWER SUPPLIES

Power Supply

TYPE	L · W · H (MM)	ORDERCODE
Driver 6W 350mA 3-22V	64 · 35 · 21	9 0 2 1 3 2 0 2
Driver 6W 700mA 3-8.4V	64 · 35 · 21	9 0 2 1 5 2 0 3